

5 Series

XP Systems - Class AB Powered Systems



Applications

- Portable sound reinforcement
- Stage Monitoring
- Corporate Events
- Mobile DJ & Touring
- Infill for large systems
- Educational Installations

Features

- True Full Range Performance.
- 1000W Peak Class-H Amplification.
- Built-in protection against overheating and over currents.
- Sturdy Poly ABS enclosure.
- Can be used as a wedge monitor.

Products in the Series

- XP 15H
- XP 12H
- XP 10H
- XP 08H

The XP series provides contractors an economic yet effective option to fulfill PA requirements. The systems are built to be minimalistic and optimised for Classrooms, Presentation Centres, Seminar Halls and other such areas where speech intelligibility is paramount.

British Acoustics

Creative Park, Langley Park,

Durham DH7 9TT, UK.

All Rights Reserved - British Acoustics


T: +44 191 373 7638

E: info@britishacoustics.com

www.britishacoustics.com

XP 12H

12 inch Powered Speaker

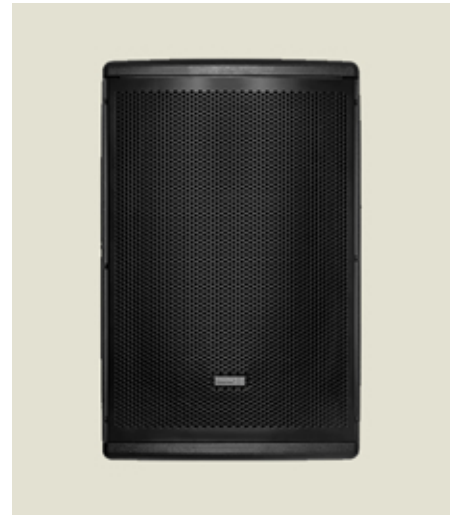

Technical Specifications

Frequency Range ^(-3 dB)	60 Hz - 20 kHz
Frequency Response ^(-10 dB)	51 Hz - 20 kHz
Coverage Pattern	100° x 60°
Max Spl	128 dB
Amplifier Power	500W Continuous, 1000W Peak
LF Driver	12" LF Driver, 2.5" VC - Ferrite
HF Driver	1.4" Titanium Compression Driver - 1" VC
Controls	Individual & Master Gain Knobs, Power Switch
AC Power Input	Universal power supply 100 - 240 VAC, 50 - 60 Hz
Connectors	2 x Balanced XLR Inputs 1 x Balanced XLR Link Output ,Power Input

General Specifications

Enclosure	High-density polypropylene enclosure
Grill	Powder coated durable grill with acoustically transparent foam
Finish	Sesimic Grey, Matte Paint Finish
Mounting System	6 fastening points (M8 type) for suspension, 35mm pole-mount adapter for stands and side-handle for transportation
Height	24.50"
Width	16.10"
Depth	15.00"
Weight	19.5 Kgs

