


DELTA 955

SINGLE 15", 2-WAY FOH SPEAKER / FLOOR MONITOR

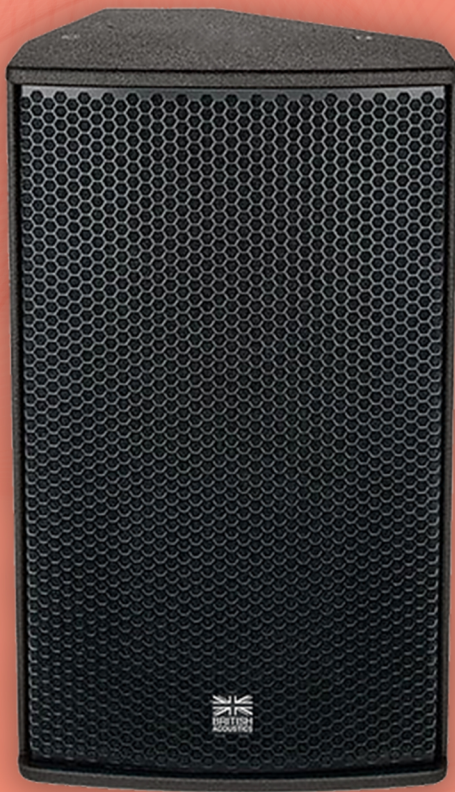

DELTA 955 2-WAY FOH SYSTEM / FLOOR MONITOR

You need Power to CHANGE THE GAME!

The British Acoustics Delta 955 is a compact, lightweight speaker designed to deliver very high output and wide frequency response in live sound, theatre, and permanent installations. Its multi-functional design excels as both a stage monitor and a PA system when paired with the Delta 918S, offering tailored performance for diverse setups. The Delta 952 features a 15" low-frequency driver paired with a 1.4" exit compression driver housed in a user-rotatable DeltaFlow Horn, providing precise sound coverage and adaptability for varied environments.



Its birchwood enclosure, coated with a scratch-free paint finish, is durable and resistant to wear, while its moulded feet ensure stability during use. Despite its robust construction, the Delta 955 is exceptionally portable and easy to carry, ideal for professionals who need efficient setup and transport options. The Delta 955 combines compact form, very high SPL, and dependable durability, making it a trusted solution for audio engineers seeking performance and versatility in a wide range of applications.



ACOUSTICAL SPECIFICATIONS

- Freq. Response (-3 dB) : 55 Hz - 20 kHz
- Freq. Range (-10 dB) : 41 Hz - 20 kHz
- Rated Power : 850W AES, 3400W Peak
- H Dispersion : 90° (- 6 dB)
- V Dispersion : 50° (- 6 dB)
- Nominal Impedance : 8 Ω
- Crossover : 1.8 kHz Passive
- Max Output : Cont. - 128dB, Peak - 134 dB
- 2 x Speak-on terminals, Input & Thru

SYSTEM SPECIFICATIONS

- Recommended Subwoofers : See Systems Chart for compatible subwoofers
- Recommended System Control : Delta 48 , Delta 98 FIR , PW 6
- Recommended Amplifiers : See Amplifier load calculation chart

LF TRANSDUCER

- 1540F - 15" Low Frequency Driver
- 750W AES, 3000W Peak
- 4" Voice Coil - Ferrite Magnet

- Motor, Suspension & Circulation optimised by FEM
- Fortex™ Treated, Weather Resistant Cones

HF TRANSDUCER

- 275F - High Frequency Compression Driver
- 100W AES, 400W Peak
- 3" Voice Coil - Ferrite Magnet
- FEM Optimised Motor & Diaphragm Very High Sensitivity
- Fitted behind the Delta Max Waveguide

HOUSING

- Marine Birchply Enclosure
- Granular Scratch Free Polyurea Paint
- Perforated Black, Pressed Steel Grills
- Integrated Handles on Either Side
- Includes a set of round bottom feet for secure and stable stacking
- Sloped Input Plates
- M10 Flying inserts
- 35mm Pole sockets
- Rubber feet for use as wedge monitor

IP SPECIFICATIONS

- IP 43 - Standard protection against dust & splashes

AESTHETIC SPECIFICATIONS

- British Acoustics Signature Umber Brown Tone
- Non Reflective, Matte Black Grills
- Available in a RAL code of your choice (24 nos, minimum)

OPERATING PARAMETERS

- Operating positions: To be used as a stage monitor, or vertically deployed over a sub, or on pole mount as an FOH Speaker
- Maximum permitted ambient temperature (Ta max) 55° C (124° F)
- Minimum permitted ambient temperature (Ta min): -9° C (15.8° F)

OPTIONAL ACCESSORIES

- See system chart for the System Accessories

SIZE

- Product : 721 x 436 x 329 mm (H x W x D)
- Product : 28.4 x 17.2 x 13.0 inch (H x W x D)
- Packed individually

WEIGHT

- Net : 26 Kgs
- Net : 58 Lbs

SHIPPING INFORMATION

- Carton Size
796 x 511 x 404 mm (H x W x D)
31.33 x 20.1 x 15.9 inch (H x W x D)
- Gross Weight : 27.3 Kgs / 60.18 Lbs
- Packed : Individually

PRODUCT INFORMATION

- Model No : Delta 955
- Series 9
- Tags : Single 15", 2-way FOH system / Floor Monitor

BA & British Acoustics are registered trademarks in the UK and other regions worldwide
Safe Installation & Rigging Practices - Installation must be by authorized personnel, following safety and rigging standards to avoid liability.
*Product specifications and design may change due to raw material variations or the addition of new features and technologies for improved performance and reliability.
*SPL Calculated @ 1m, Free Field with Pink Noise - Crest Factor 4





One Basecamp, 49 Jamaica Street, Liverpool, L10AH, Great Britain.
Email - info@britishacoustics.com | Tel - +44 (0) 151 515 0170
www.britishacoustics.com