

9 Series

Delta 900 - For the stage that accepts no compromise



Applications

- Portable sound reinforcement
- Live sound reinforcement
- Unobtrusive stage monitoring
- Corporate AV events and conferences
- Mobile Touring
- Speech Transmission

Features

- Custom British Acoustics Transducers
- Preset Library available
- Pole mount socket available (except the Delta 925)
- True full-range performance
- Durable construction with scratch resistant textured pain finish
- Ideal for floor monitoring, side-fills or FOH use

Products in the Series

- Delta 925
- Delta 915
- Delta 912

Delta 900 Live sound systems are a range of premium portable speakers that deliver superior sound quality, power handling, and craftsmanship in their class. Extreme quality control, skilled craftsmanship and a systems design approach has led to the groundbreaking success of the Delta 900 series

British Acoustics

Creative Park, Langley Park,

Durham DH7 9TT, UK.

All Rights Reserved - British Acoustics

M: +44 (0) 1494 535 312

E: info@britishacoustics.com

www.britishacoustics.com

Delta 912


Single 12", 2-way FOH system / Floor Monitor

Technical Specifications

Frequency Range (-10 dB)	50 Hz - 20 kHz
Frequency Response (-3 dB)	75 Hz - 20 kHz
Coverage Pattern	70° x 70°
Max Spl	130 dB
Crossover Frequency	2.2 kHz
Rated Power	Passive: 500W Continuous, 2000W Peak
Nominal Impedance	8 Ohms
LF Driver	12" Delta Drivers, 4" VC - Ferrite
HF Driver	1.5" exit compression driver, 3" VC
Sensitivity	95 dB

General Specifications

Enclosure	Marine Birchwood Cabinet, Premium Grade
Grill	Powder coated durable grill with acoustically Transparent foam
Finish	British Acoustics' Signature Brown Finish
Mounting System	Pole Mount Socket - Integrated Handles - M-10 insertion points
Height	28.4"
Width	17.2"
Depth	13"
Weight	26 Kgs

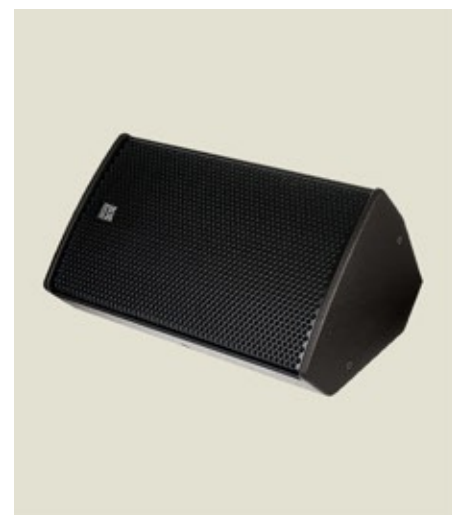

British Acoustics

Creative Park, Langley Park,

Durham DH7 9TT, UK.

All Rights Reserved - British Acoustics

T: +44 191 373 7638

E: info@britishacoustics.com

www.britishacoustics.com