

4 Series

Alpha Subwoofers - High Performance Subwoofers



Applications

- Live Sound Reinforcement
- Performance Venues
- Touring Sound
- High Energy Installations
- Outdoor Festivals
- Arenas & Stadiums

Features

- Custom British Acoustics Transducers
- Preset Library available
- Low-resonance build structure
- Engineered ports for reduced turbulence
- Durable construction with scratch resistant textured paint finish
- Scratch resistant signature brown paint finish
- Stackable Feet

Products in the Series

- Alpha 428 RS
- Alpha 418 RS

Dust, Splash & UV-resistant .Built with our signature Ultra-low distortion woofer.Allows systems designers to add LF extensions to outdoor installations .Double dura-coated grille for costal use .Sealed terminals to enhance durability"

British Acoustics

Creative Park, Langley Park,

Durham DH7 9TT, UK.

All Rights Reserved - British Acoustics

T: +44 191 373 7638

E: info@britishacoustics.com

www.britishacoustics.com

Alpha 428 RS


Twin 18" Rear Firing Subwoofer

Technical Specifications

Frequency Range (-10dB)	37 Hz - 200 kHz
Frequency Response (-3dB)	32 Hz - 190 Hz
Coverage Pattern	Omni-directional
Max Spl	144 dB
Inputs	2 x Speak-on Connectors, Wired Parallel
Rated Power	2000W Continuous, 8000W Peak
Nominal Impedance	4 Ohms
LF Driver	2 x 18" Ultra Low Excursion ADR Drivers, 4" VC - Ferrite
Sensitivity	101.5 dB

General Specifications

Enclosure	Marine Birchwood Cabinet, Premium Grade
Grill	Perforated Stainless Steel Grill backed by acoustically transparent foam over a stainless steel mesh
Finish	British Acoustics' Signature Brown Finish
Mounting System	Integrated Handles - M-10 insertion points
Height	20"
Width	47.2"
Depth	30"
Weight	82 Kgs

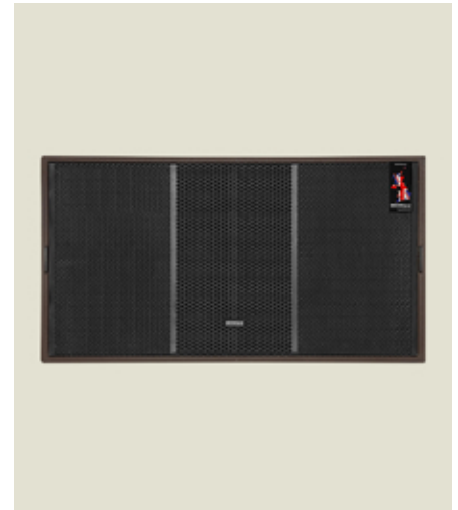

British Acoustics

Creative Park, Langley Park,

Durham DH7 9TT, UK.

All Rights Reserved - British Acoustics

T: +44 191 373 7638

E: info@britishacoustics.com

www.britishacoustics.com