


2 Series

Radial Systems - Radial Premium Outdoor Installation Systems

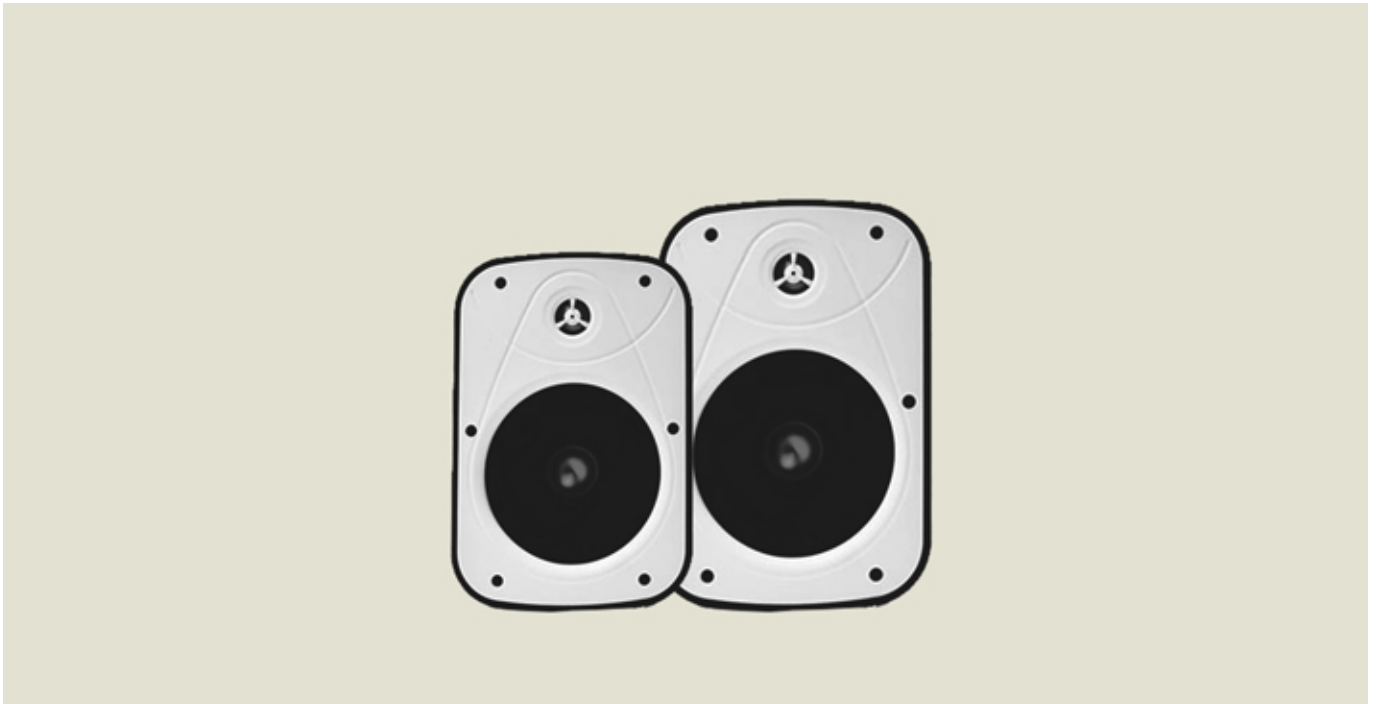

Applications

- Portable sound reinforcement
- Bars and restaurants
- Nightclubs
- Unobtrusive stage monitoring
- Corporate AV events and conferences
- Weddings and parties
- Secondary stages at festivals

Products in the Series

- Radial 208 TW
- Radial 206 TW
- Radial 205 TW
- Radial 210 S

Features

- Low Saturation, minimal loss Hi-z transformer technology
- Compact and industrial design for corporate venues
- IP-66 rated enclosures for environmental applications
- True application versatility ranging from corporate AV to BGM solutions
- Comes pre-boxed with an XY-axis bracket
- Rugged ABS enclosure with sombre black matte finish

Radial systems are our general installation solutions for versatile applications delivering impressive fidelity across a vast dynamic range. The Radial systems are compact, IPX-66 ABS enclosure systems with silk dome tweeters for smooth & consistent coverage pattern and a low saturation Hi-z transformer for large installations.

British Acoustics

Creative Park, Langley Park,
Durham DH7 9TT, UK.

All Rights Reserved - British Acoustics

T: +44 191 373 7638

E: info@britishacoustics.com

www.britishacoustics.com

Radial 210 S

Single 10" IP 67 rated Subwoofer

Technical Specifications

Frequency Range (-10dB)	50 Hz - 300 Hz
Frequency Response (-3dB)	39 Hz - 300 Hz
Coverage Pattern	Omnidirectional
Max Spl	119 dB
LF Driver	10" Rubber Surround LF, Weather treated cone, 2" VC - Ferrite
Rated Power	150W Continuous, 600W Peak
Nominal Impedance	4 Ohms
Inputs	Screw-Down Terminal Strip, Input / Link
Sensitivity	88 dB

General Specifications

Enclosure	Dura-light ABS Enclosure
Grill	Bottom firing design, No Grills
Finish	Clean Matte White Finish
Mounting System	Floor Standing, Wall or Ceiling Mount
Height	12"
Diameter	16.5"
Weight	13 Kgs

