


VF-104 XTC

4" HIGH PERFORMANCE RIMLESS CEILING SPEAKER

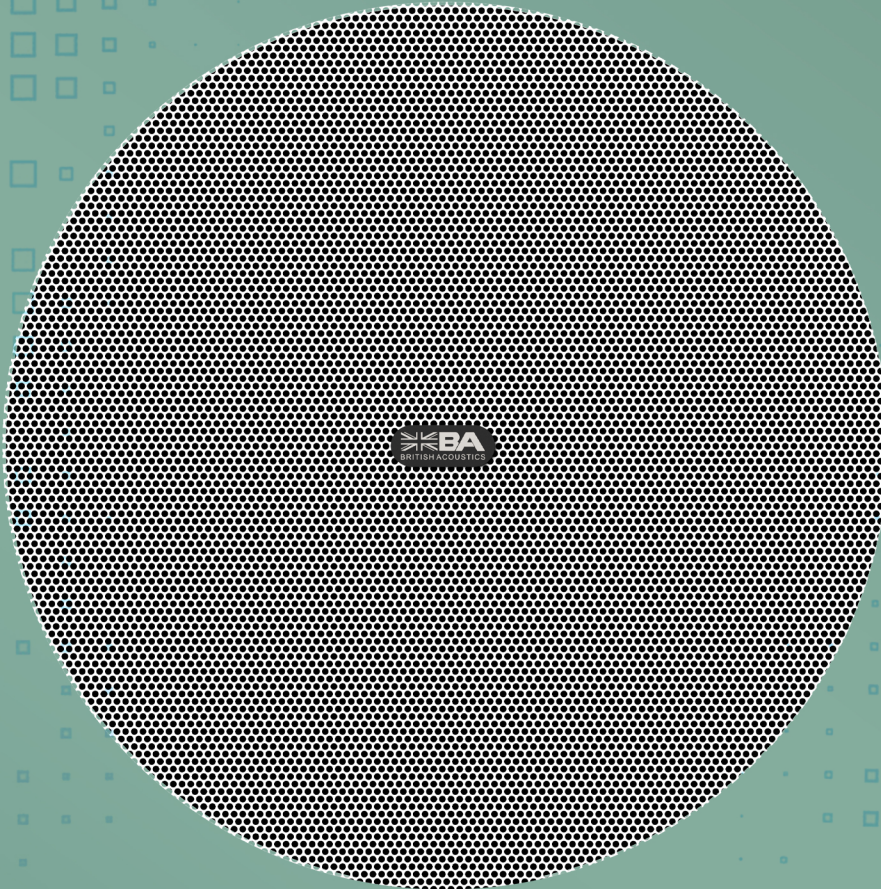


 **BA**
BRITISH ACOUSTICS

VE-104 TC CEILING SPEAKER

The VF-104 XTC is a compact, high-performance ceiling speaker designed for seamless integration into architectural spaces. It features a 4-inch Vero driver and a 0.7-inch HF transducer, delivering clear and detailed sound with 60W AES power and 240W peak output. With a 130° conical dispersion, it ensures uniform audio coverage across large areas.



The VF-104 XTC's durable construction includes impact-resistant ABS housing with a friction-painted silver or white finish. Its quick-fit recess locking mechanism allows for easy installation, while the fully sealed enclosure enhances bass performance. Compatible with 100V/70V transformer taps and offering optional pendant mount accessories, it is versatile for flush-mounted or pendant-style applications.

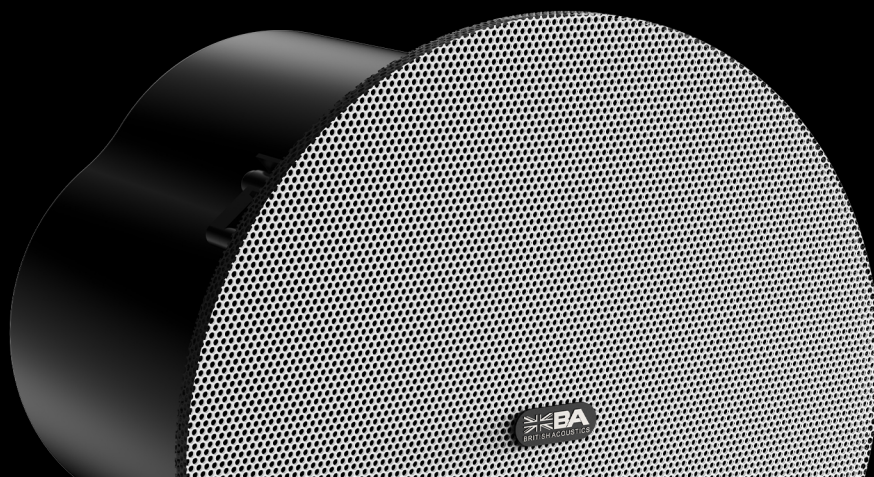



ACOUSTICAL SPECIFICATIONS

- Freq. Response (-3 dB) : 81 Hz - 20 kHz
- Freq. Range (-10 dB) : 65 Hz - 20 kHz
- Rated Power : 60W AES, 240W Peak
- Dispersion : 130° conical
- Crossover : 2.1 kHz Passive
- Nominal Impedance : 8 Ω
- Max Output : 109 dB

SYSTEM SPECIFICATIONS

- Recommended Subwoofers : See Systems chart for compatible subwoofer
- Recommended Amplifiers : See Amplifier load calculation chart
- Recommended System Control : Can be used without DSP or with the PW-Six DSP for voicing & tonal benefits

CO-AXIAL TRANSDUCER

- LF : V4L-12 Vero Drivers
- 60W AES, 240W Peak
- 0.7" Voice Coil - Ferrite Magnet
- 4" Mid-High Frequency
- Vero Design Material Science for unique & optimised cone material
- Large Slotted Ports for better performance in the lower frequency range
- HF : V4H-25 Vero HF Transducers, 1" Exit
- 15W AES, 60W Peak
- 5" Voice Coil - Ferrite Magnet

HOUSING

- Impact Resistant ABS with UV Stabilisers
- Silver Body, Friction painted
- White & Black Rimless Grills available
- Quickfit recess locking mechanism
- Fully Sealed Enclosure for better bass response

- Quickfit recess locking mechanism
- Terra Locks for external mounts

OPTIONAL ACCESSORIES

- See system chart for the System Accessories

IP SPECIFICATIONS

- Standard Version : IP 42 - Offers basic protection against dust & splashes

OPERATING PARAMETERS

- Operating Positions : Must be Flush Mounted as per the manual into the ceiling or used with the pendant accessory
- Maximum permitted ambient temperature (T_a max) 55° C (124° F)
- Minimum permitted ambient temperature (T_a min): -20° C (-4° F)

SIZE

- Product: 508 x 203.2 x 203.2mm (H x W x D)
- Product: 20 x 8 x 8 inch (H x W x D)
- Packed individually

WEIGHT

- Net : 11 kgs
- Net : 24.25 Lbs


SHIPPING INFORMATION

- Carton Size
583 x 278.2 x 278.2 mm (H x W x D)
23 x 11 x 11 inch (H x W x D)
- Gross Weight : 11.55 Kgs / 25.46 Lbs
- Packed : individually

PRODUCT INFORMATION

- Model No : VF-104 XTC
- Series 1
- Tags : 4" High Performance Rimless Ceiling Speaker

BA & British Acoustics are registered trademarks in the UK and other regions worldwide.
Safe Installation & Rigging Practices : Installation must be by authorized personnel, following safety and rigging standards to avoid liability.
*Product specifications and design may change due to raw material variations or the addition of new features and technologies for improved performance and reliability.
*SPL Calculated @ 1m, Free Field with Pink Noise - Crest Factor 4





One Basecamp, 49 Jamaica Street, Liverpool, L10AH, Great Britain.
Email - info@britishacoustics.com | Tel - +44 (0) 151 515 0170
www.britishacoustics.com