

DELTA 928 S

DUAL 18" HIGH PERFORMANCE SUBWOOFER



DELTA 928 S PERFORMANCE SUBWOOFER

You need Power to CHANGE THE GAME!

The British Acoustics Delta 928 S builds upon the legacy of the renowned Delta 828, delivering enhanced performance and reliability for demanding live sound applications. Designed with modern advancements, it features improved and more efficient drivers, ensuring better sound output and system efficiency. Equipped with dual 18" long excursion drivers, the Delta 928 S offers extended low-frequency response with high resonance, delivering deep, impactful bass that is essential for live performances. Its advanced design minimizes port turbulence, ensuring cleaner, distortion-free output, even at high sound pressure levels.



With its rugged construction and optimized performance, the Delta 928 S is ideal for professionals seeking robust, high-performance subwoofer solutions. Whether used for concerts, festivals, or touring productions, the Delta 928 S provides powerful and precise low-end reinforcement that lives up to the Delta Series' reputation for excellence.



ACOUSTICAL SPECIFICATIONS

- Freq. Response (-3 dB) : 37 Hz - 150 Hz
- Freq. Range (-10 dB) : 31 Hz - 150 Hz
- Rated Power: 2000W AES, 8000W Peak
- Omni Directional
- Cardioid presets available
- Nominal Impedance : 8 Ω
- Crossover : 80 - 120 Hz Active
- Max Output : Cont. - 136dB, Peak - 142 dB
- 2 x Speak-on terminals, Input & Thru

SYSTEM SPECIFICATIONS

- Recommended System Control : Delta 48 , Delta 98 FIR , PW 6
- Recommended Amplifiers : See Amplifier load calculation chart

LF TRANSDUCER

- 1840 F - 18" Ultra Low Excursion driver
- Two drivers connected in parallel
- 1000W AES, 4000W Peak
- 4" Voice Coil - Ferite Magnet
- Double Silicon Spider
- Optimised Heat Dissipation

HOUSING

- Marine Birchply Enclosure
- Granular Scratch Free Polyurea Paint
- Perforated Black, Pressed Steel Grills
- Integrated Handles on Either Side
- Includes a set of vertical bottom feet for secure and stable stacking

IP SPECIFICATIONS

- IP 43 - Standard protection against dust & splashes

AESTHETIC SPECIFICATIONS

- British Acoustics Signature Umber Brown Tone
- Non Reflective, Matte Black Grills
- Available in a RAL code of your choice (24 nos, minimum)

OPERATING PARAMETERS

- Operating positions: Can be used horizontally or vertically and can be used as a stack of subs
- Maximum permitted ambient temperature (Ta max) 55° C (124° F)
- Minimum permitted ambient temperature (Ta min): -9° C (15.8° F)

OPTIONAL ACCESSORIES

- Acc 928 S WC : Weather Cover
- Acc 928 S FC : Flight Case for 1 unit
- See system chart for the System Accessories

SIZE

- Product : 596.9 x 1111 x 730 mm (H x W x D)
- Product : 23.5 x 43 x 28 inch (H x W x D)
- Packed individually

WEIGHT

- Net : 76.45 Kgs
- Net : 168.67 Lbs

SHIPPING INFORMATION

- Carton Size
717.55 x 1219.2 x 850.9 mm (H x W x D)
28.25 x 48 x 33.5 inch (H x W x D)
- Gross Weight - 82.45 Kgs / 181.88 Lbs
- Packed : Individually

PRODUCT INFORMATION



- Model No : Delta 928 S
- Series 9
- Tags : Dual 18" High Performance Subwoofer

BA & British Acoustics are registered trademarks in the UK and other regions worldwide

Safe Installation & Rigging Practices : Installation must be by authorized personnel, following safety and rigging standards to avoid liability.

*Product specifications and design may change due to raw material variations or the addition of new features and technologies for improved performance and reliability.

*SPL Calculated @ 1m, Free Field with Pink Noise - Crest Factor 4

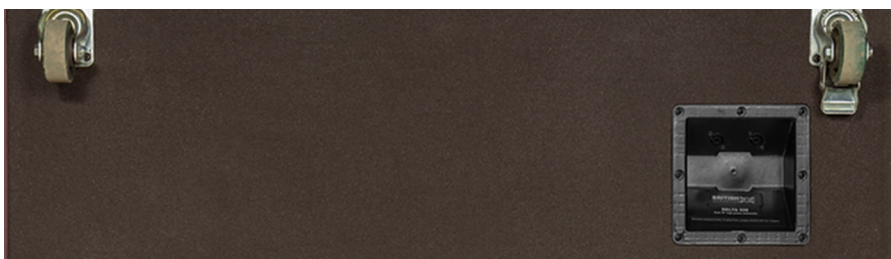



One Basecamp, 49 Jamaica Street, Liverpool, L10AH, Great Britain.
Email - info@britishacoustics.com | Tel - +44 (0) 151 515 0170
www.britishacoustics.com